

# COMMERCIAL/INDUSTRIAL

• *Final color selection should be made from actual color chips.*

- All products available in smooth or embossed finish.
- Trim available in all colors.
- A 40-year limited paint warranty is available upon written request for all colors except for Crimson Red, Polar White. Please review our sample warranty for complete performance attributes and terms and conditions.

## SIGNATURE® 200 STANDARD COLORS 26-GAUGE MATERIAL

Siliconized Polyester  
Polar White is a Straight Polyester.

\* Also available in 29-gauge



HAWAIIAN BLUE ★  
SR .32 SRI 35



CRIMSON RED ★  
SR .33 SRI 34



FERN GREEN ★  
SR .28 SRI 29



BURNISHED SLATE ★  
SR .28 SRI 29



ASH GRAY ★  
SR .48 SRI 56



SADDLE TAN ★  
SR .48 SRI 56



DESERT SAND ★  
SR .42 SRI 48



KOKO BROWN ★  
SR .28 SRI 30



CHARCOAL GRAY ★  
SR .28 SRI 30




COBALT BLUE ★  
SR .28 SRI 27




RUSTIC RED ★  
SR .36 SRI 40



LIGHT STONE ★  
SR .50 SRI 58



POLAR WHITE\* ★  
SR .58 SRI 69



SOLAR WHITE\*\* ★  
SR .74 SRI 91

COLOR CHART

770-456-1602  
fax: 770-456-1662  
toll free: 877-456-1602



1836 Carrollton Villa Rica Hwy.  
Suite 111  
Villa Rica, GA 30180



\* ENERGY STAR® Qualified

## SOLAR REFLECTIVITY (SR)?

Solar reflectivity or reflectance (SR) is the ability of a material to reflect solar energy from its surface back into the atmosphere. The SR value is a number from 0 to 1.0. A value of 0 indicates that the material absorbs all solar energy and a value of 1.0 indicates it is all reflected. Energy Star® requires SR testing of both new and aged roof products. New products must have an SR value of 0.25 or higher for steep slope (above 2:12) roofing and an SR value of 0.65 or higher for low slope (2:12 or less) roofing. Aged testing takes 3 years to complete, so not all products that meet the initial requirements are qualified. For more information, please go to [www.energystar.gov](http://www.energystar.gov).




## SOLAR REFLECTANCE INDEX (SRI)?

The SRI is used to determine compliance with LEED requirements and is calculated according to ASTM E 1980 using values for reflectance and emissivity. Emissivity is a material's ability to release absorbed energy. To meet LEED requirements, a roofing material must have an SRI of 29 or higher for steep slope (above 2:12) roofing and an SRI value of 78 or higher for low slope (2:12 or less) roofing. For more information, please go to [www.usgbc.org](http://www.usgbc.org).


PANEL PROFILE	Panel	29 GAUGE		26 GAUGE		24 GAUGE		22 GAUGE	
		Galvalume Plus	Sig 200	Galvalume Plus	Sig 200	Galvalume Plus	Sig 200	Galvalume Plus	Sig 200
 "PBR" PANEL	PBR	●	■	●	■	●	■	●	■
 "PBU" PANEL	PBU	●	■	●	■	●	■	●	■
 "PBC" PANEL	PBC	●	■	●	■	●	■	●	■
 "PBD" PANEL	PBD	●	■	●	■	●	■	●	■
 7.2 PANEL	7.2	●	■	●	■	●	■	●	■
 "PBA" PANEL	PBA	●	■	●	■	●	■	●	■

● Available in any quantity    ■ May require minimum quantity

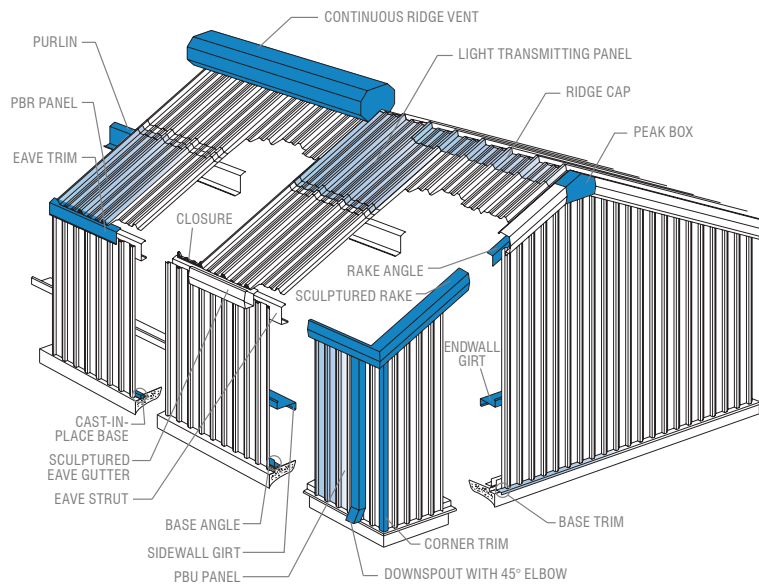

## AVAILABLE ACCESSORIES

- Hat and Channel Sections
- Light Transmitting Panels
- Vents
- Roof Jacks
- Fasteners
- Ridge Caps
- Closures
- Doors
- Windows
- Sealants
- Insulation
- Bracing
- Bolts
- Louvers
- Sliding Door Hardware

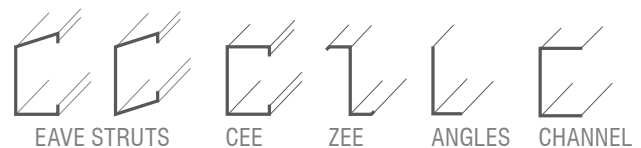

For complete performance specifications, product limitations and disclaimers, please consult MBCI's Paint and Galvalume Plus® warranties. Upon receipt of payment in full, these warranties are available upon request for all painted or Galvalume Plus®, prime products. Sample copies can be found at [www.mbc.com](http://www.mbc.com) or contact your local MBCI Sales Representative.